
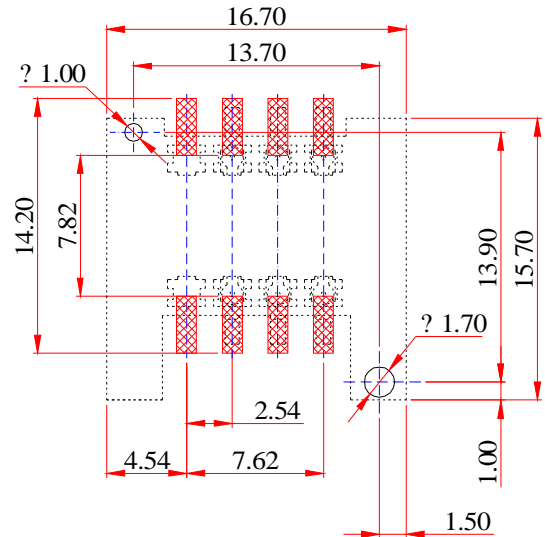


PCB

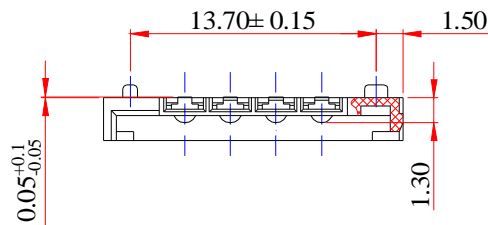

Specifications:

- 1.Operation temperature : -30~+80℃
- 2.Current rating: Signal Terminal: 0.5A
- 3.Voltage rating: AC 100V
- 4.Contact resistance: 30mΩ max.
- 5.Insulation resistance: 1000MΩ min.
- 6.Dielectric voltage: 500V AC /1minute
- 7.Durability (mating cycles) min.: 5000 cycles

2	Contact	8	Phosphor Copper/t=0.15mm	CuSn/Ep: Ni50 μ "· Au10 μ "at mating area/Ni50 μ "· Au2 μ "at solder area
1	Insulator	1	LCP	UL94V-0,black
Item	Name	QTY	Material	Note

旧底图总号

Revise mark	QTY	DR.	CHK.	DATE
公差: TOLERANCE:	× . ±0.30	. ×	. × × ×	±0.2
	. × × ±0.15	. × × ×		±0.05

底图总号

设计: DRAW BY: 万彩霞 2005.08.12

日期 签名


审核: CHK'D BY: 谭孟春 2005.08.12

批准: APPD BY: 杨书胜 2005.08.12

SIM0824

YXD5.232.025

比例: SCALE: 版号: REV: A 单位: UNIT: mm



第 张 共 张

插座



浙江森大电子有限公司